

ZUG LED m1200


2770 lm, PC Tropol® (fracture proof), medium beam

Item Number: 775 480 34 84 - E - MC1

LED



Illustration may differ

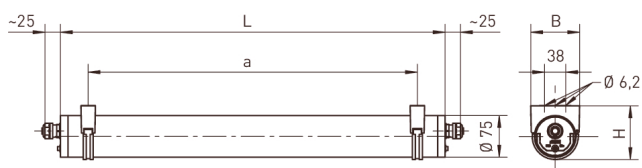

XARA® (optional)

medium beam

LIGHT ON THE POINT

DIMENSIONS

L	B	H	a	max. Weight
1410 mm	88 mm	97 mm	1310 mm	4,0 kg

DESCRIPTION

Tubular luminaire with LED lamps. Useable in industrial applications, in work pits used for maintenance and repair work and for decorative indoor and outdoor lighting with special requirements. Polymer luminaire tube (Ø 75 mm) with two quick-mounting pressure caps and protection against unauthorised opening. Useable in indoor and outdoor areas according to protection rating IP 65, IP 66 and IP 67. Resistant to pressurised water up to 20 m; due to protection rating IP 68, 20 m. Suitable for intensive cleaning processes using pressure washers due to high protection rating IP 69K. Luminaire tube made of PMMA Transopal® (impact strengthened) or PC Tropol® (fracture proof), homogeneous illumination. Luminaire ready for mounting and installation. Ceiling or wall fixing using two mounting clamps made of stainless steel / black/transparent polymer with variable mounting distance, including protections against unauthorised opening.

1. Standard version: Built-in driver 230 V AC/DC, optionally suitable for emergency lighting. 2 kV transient filter.

Created on: 20.03.2020 (ext.) • Subject to technical changes without prior notice • LED modules and drivers are subject to a constant increase in efficiency • Current luminous flux and system performance can be found on our website norka.de

ZUG LED m1200

2770 lm, PC Tropol® (fracture proof), medium beam


Item Number: 775 480 34 84 - E - MC1

CHARACTERISTICS

Version	m1200	Lamp power	1 x 13 W
Lamp	LED	System power	16 W
Lamp service life	L80 B10 > 60.000 h at +40°C	Colour temperature	White, 840/4000 K, Ra > 80
Extreme-temperature	-25°C to +40°C	Luminous flux lamp	2770 lm
Number of lamps	1-lamp	Protection class	II
Housing material	polymer	IP-rating	IP65, IP66, IP67, IP68 20m, IP69K
Colour housing	None	UGR Value (4H8H)*	22
Material / Cover	PC Tropol® (fracture proof)	Type of gear	LED operating device current-controlled, 230 V - 240 V AC/DC
Light distribution	medium beam	Through-wiring	4 x 1,5 mm ²
Manufacturer warranty	5 years	Impact strength	IK10
ENEC / VDE	Yes / Yes	Installation type	wire suspension, Cable suspension, ceiling mounting, wall mounting, single mounting, row mounting
EL (Emergency Lighting)	optional		

* The above mentioned UGR is based on example calculations. The effective value can only be determined with a light calculation.

DIAGRAMS



LOR: 96,3%