

# EMERGENSEE™ LITE

## D40 LED - RECESSED MOUNTED NON-MAINTAINED EMERGENCY LIGHT

Discreet, bright and low maintenance, the EmergenSee™ Lite represents a reliable, versatile, safe, effective and easy to install emergency lighting solution that can be depended upon when it is needed the most.

The dual-disc interlock system offers compatibility with a wide range of cutout sizes and can be used in almost all internal general applications including offices, shopping centres, commercial properties, and residential buildings.



(EME-LITE: recessed)

(EME-SURF: surface mounted)  
^image minimised




# Technical Specifications

Item	Part Number	EME-LITE	EME-SURF
	Description	D40 LED Recessed Mounted Non-Maintained Emergency Light c/w High Temp NiCd Battery	D40 LED Surface Mounted Non-Maintained Emergency Light c/w High Temp NiCd Battery
Input	Voltage & Frequency	230VAC ; 50Hz	
	Installation	Complete with 1.2m flex cable & plug	Terminal block, 20mm <sup>2</sup> cable entry
Output	Light Source	High performance 3W LED - lifetime warranty	
	Mode of Operation	Non-Maintained	
	Power Consumption	2W (standby)	
	Emergency Duration	> 120 minutes	
Controls	Charger	16hr dual rate boost and trickle charge	
	Protection	Overcharge, low voltage disconnect, overcurrent, short circuit	
	Testing Facility	Manual test switch	
	Indicators	Battery charger green LED	
Physical	Construction	Flame-retardant polycarbonate	Folded sheet metal, powder coat white
	Mounting	Recessed - ceiling, 65 - 130mm cut-out	Surface mounted - ceiling
	Dimensions L x W x H	Disc: 85mm or 145mm diameter	255mm x 175mm x 45mm
	IP Rating	IP 20	
	Weight	1.0kg	2.0kg
	Warranty	3 years	
Environment	Operating Temperature	1° to 40°C	
	Relative Humidity	0 to 95%	
Compliance	Standards	RCM / EMC, AS/NZS 2293, AS/NZS 60598.1	
	AS/NZS 2293 Classification	C0 D40 C90 D40	
Accessories	Replacement Battery	P/N: BAT-EMELITE: High temperature nickel cadmium (NiCd)	


**NOTE:** Product specifications subject to change without prior notice due to ongoing product improvement policy and changes to industry standards.

## Dimensions

EME-LITE:

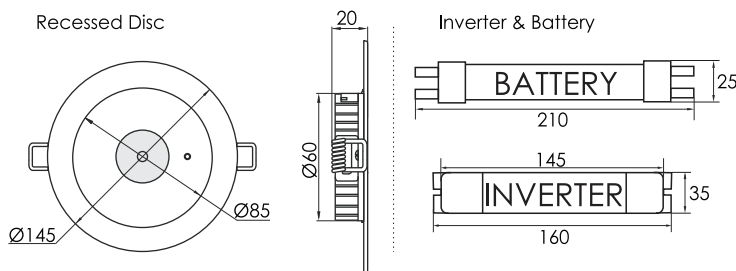

EME-SURF:

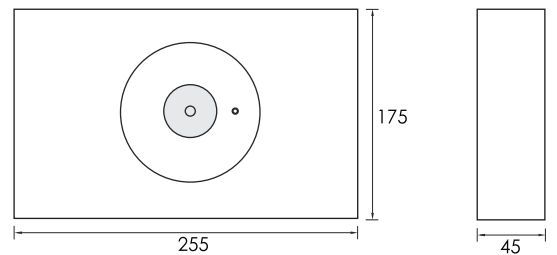

## Spacing Table

SPACING TABLE	MOUNTING HEIGHT (m)									
	2.1	2.4	2.7	3.0	4.0	5.0	6.0	8.0	10.0	
NATA Classification										
C0 - D40	16.7	17.4	18.0	18.6	20.1	21.3	22.1	23.0	23.1	
C90 - D40	16.7	17.4	18.0	18.6	20.1	21.3	22.1	23.0	23.1	

## Distributed By:

