


EXODUS™ AQUA65

**WEATHERPROOF IP65 - WALL / CEILING
MAINTAINED LED EXIT LIGHT**

The AQUA65 is a sturdy wall mounted LED Exit Light that is designed to withstand external environments and harsh weather conditions. It produces excellent illumination with a long lasting battery for years of dependable Exit Lighting.

Its robust, water-tight polycarbonate enclosure provides excellent protection against water and dust and is well suited for a range of outdoor applications such as car parks and exposed stairwells, as well as indoor areas such as swimming centres, construction zones, train stations and cool rooms.

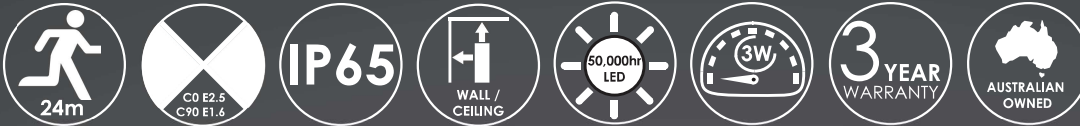

SYNTHIUM[™] is an advanced environmentally-sustainable energy development that offers extended battery life, low cost of ownership, enhanced performance and improved safety.




Technical Specifications

Item	Part Number	EXS-AQUA65
	Description	LED Weatherproof IP65 Wall / Ceiling Mount 24m Exit Light c/w <i>Synthium™</i> Battery
Input	Voltage & Frequency	230VAC : 50Hz
	Installation	Large terminal block and 20mm ² cable entry
Output	Light Source	High efficacy LED strip, 50,000 hours
	Mode of Operation	Maintained
	Power Consumption	4W (standby)
	Emergency Duration	> 120 minutes
Controls	Charger	Intelligent 3-stage charger with <i>Synthium™</i> battery management system
	Protection	Overcharge, low voltage disconnect, overcurrent, short circuit
	Testing Facility	Manual test switch
	Indicators	Battery charger green LED
Physical	Diffuser	All variations of Running Man pictogram
	Construction	Flame-retardant polycarbonate
	Mounting	Surface mounted - wall or ceiling (single or double side application)
	Dimensions L x W x H	430mm x 310mm x 160mm
	IP Rating	IP 65
	Weight	2.5kg
Environment	Operating Temperature	1° to 40°C
	Relative Humidity	0 to 95%
Compliance	Standards	RCM / EMC, AS/NZS 2293, AS/NZS 60598.1
	AS/NZS 2293 Classification	C0 D6.3 C90 D3.2
Accessories	Replacement Battery	P/N: BAT-AQUA65: <i>Synthium™</i> LiFePO ₄

NOTE: Product specifications subject to change without prior notice due to ongoing product improvement policy and changes to industry standards.

Dimensions

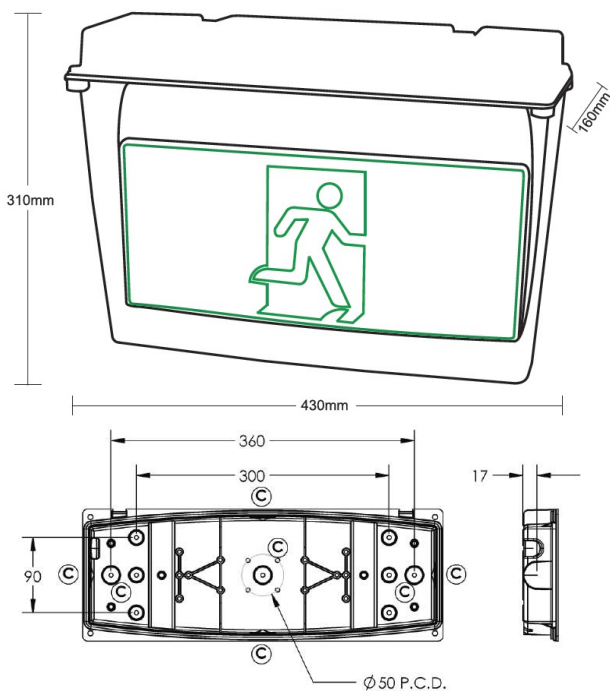

Spacing Table

This product performs the dual role as an 24m Exit Sign and an Emergency luminaire with the following NATA-accredited emergency classifications:

SPACING TABLE		MOUNTING HEIGHT (m)			
NATA Classification		2.1	2.4	2.7	3.0*
EXS-AQUA65	C0 - D6.3	8.6	8.8	9.0	9.1
	C90 - D3.2	6.0	6.2	6.4	6.6

* Maximum mounting height allowed is 2.7m but for exceptions see AS2293.1 2005

Distributed By:

